

# PUMPTAC

## Expertise's Best Solution



ATP TYPE

TP TYPE

GTP TYPE


### TP Series

#### Features


- ✓ Vortex impeller with abrasion-resistance resin (TPU), suitable for construction site.
- ✓ Double mechanical seal with silicone carbide, equipped in the oil chamber.
- ✓ High efficiency motor with auto reset thermal protector to prevent the abnormal accident.
- ✓ Designed agitator to keep free from air lock and sand block.
- ✓ Auto version for small pit usage.

#### Constructions


| NO | Parts         | Material |
|----|---------------|----------|
| 9  | Handle        | Nylon 6  |
| 15 | Motor Cover   | ADC12    |
| 17 | End Bracket   | SECC     |
| 20 | Pump Casing   | FC 200   |
| 21 | Impeller      | TPU      |
| 23 | Strainer      | PVC      |
| 24 | Agitator      | SMF5030  |
| 25 | Mech. Seal    | Sic/Sic  |
| 54 | Shaft         | SUS 410  |
| 57 | Motor Housing | ADC 12   |

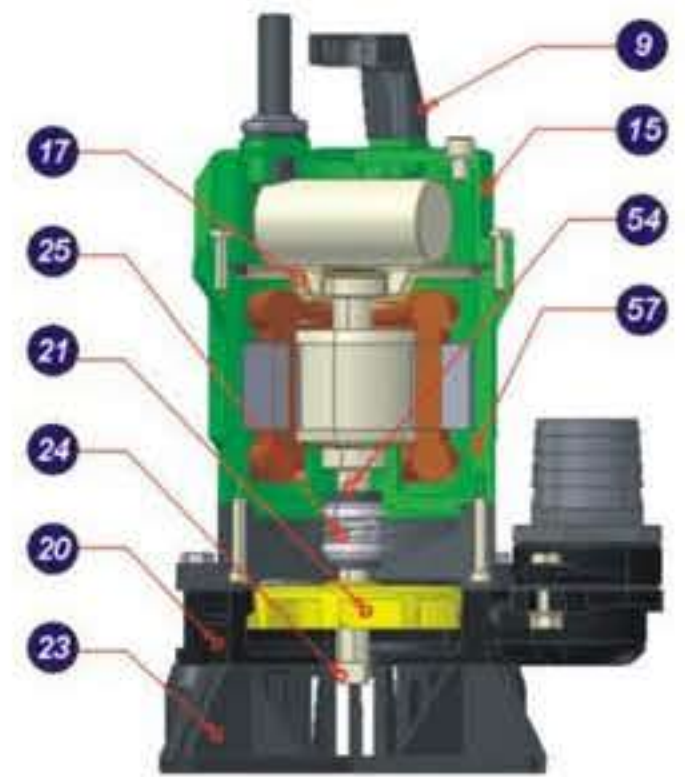

#### Dimensions

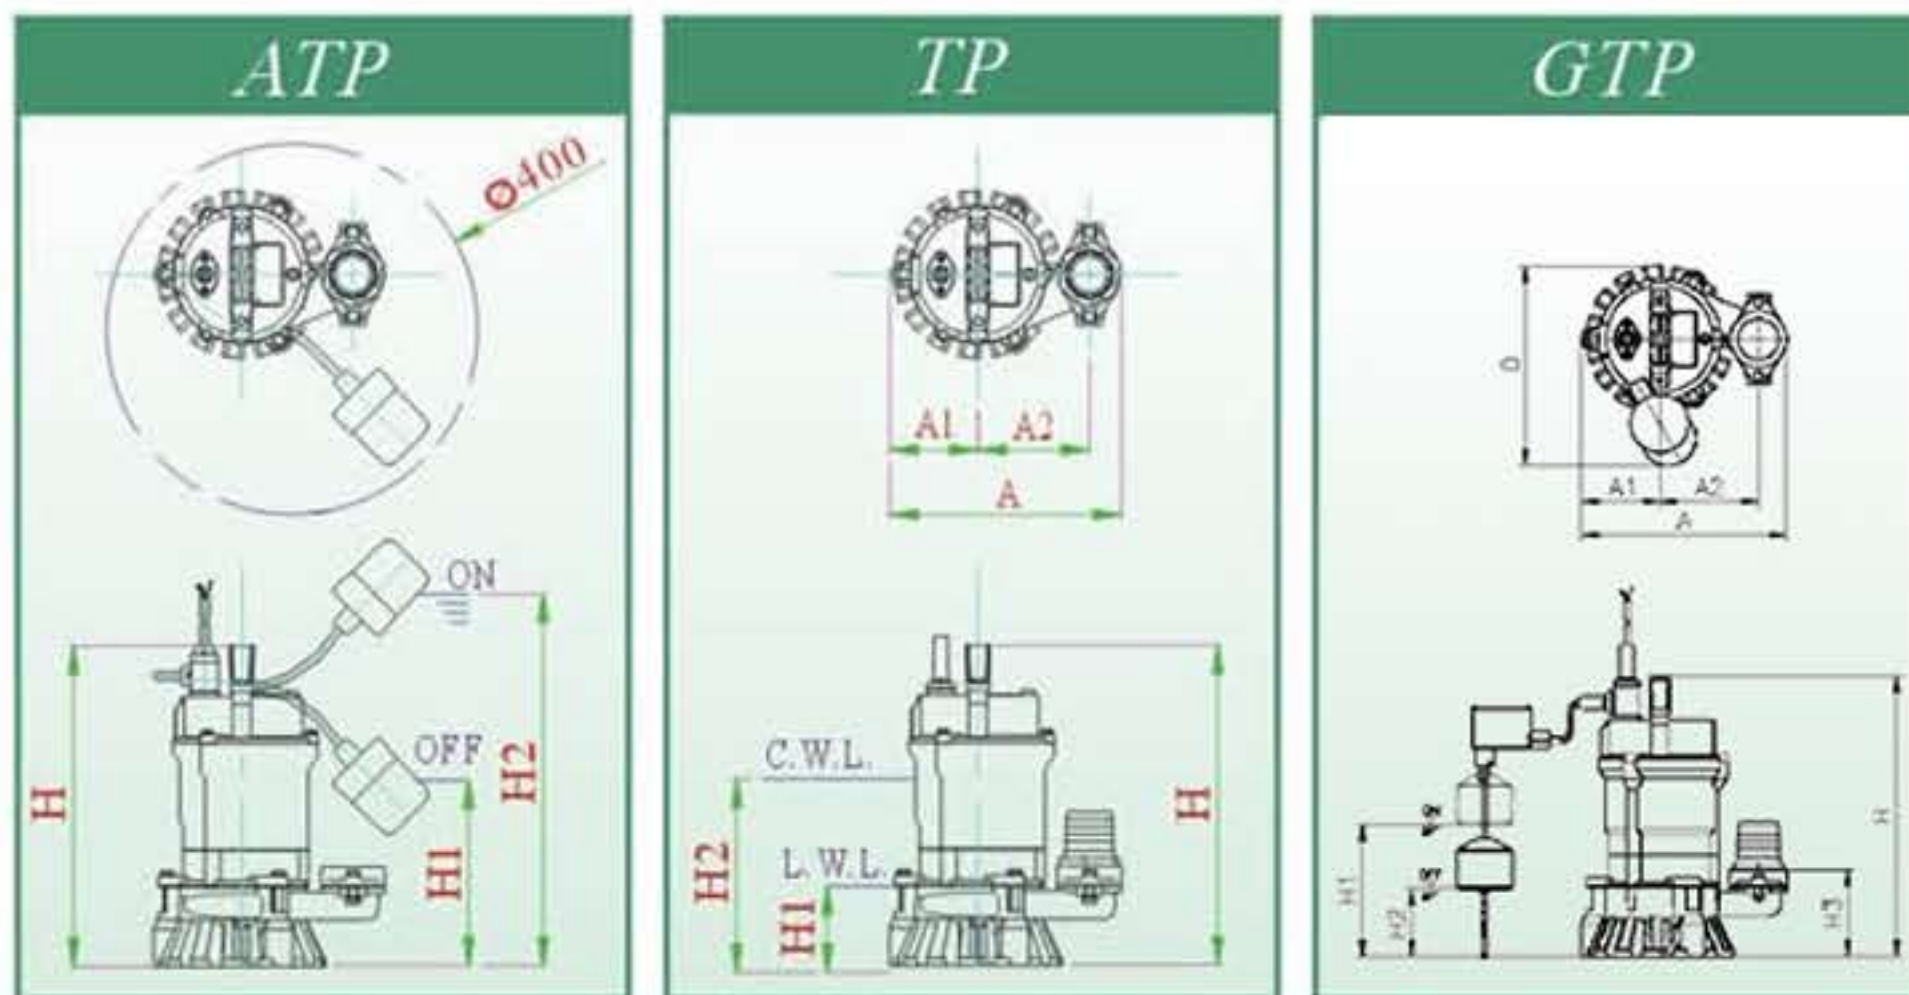

#### Performance

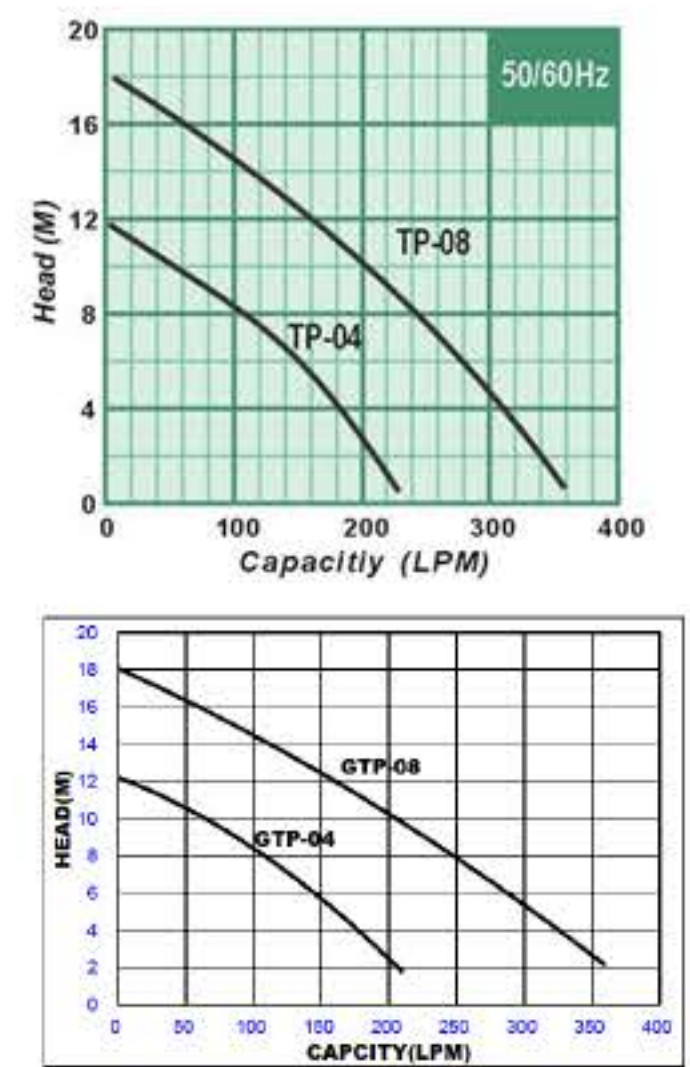

#### Specifications

| Outlet mm | Model         | Version | Output kW | Power Supply |             | Dimensions (Unit:mm) |                |                |     |                |                | Weight Kg |
|-----------|---------------|---------|-----------|--------------|-------------|----------------------|----------------|----------------|-----|----------------|----------------|-----------|
|           |               |         |           | Ø            | V           | A                    | A <sub>1</sub> | A <sub>2</sub> | H   | H <sub>1</sub> | H <sub>2</sub> |           |
| 50        | TP-04-50      | Manual  | 0.4       | 1.3          | 110,220,380 | 249                  | 95             | 120            | 343 | 90             | 200            | 12        |
|           | ATP-04-50     | Auto    | 0.4       | 1            | 110,220     | 249                  | 95             | 120            | 343 | 200            | 400            | 12.3      |
|           | GTP-04-50     | Auto    | 0.4       | 1            | 110,220     | 250                  | 95             | 120            | 344 | 344            | 162            |           |
| 50(80)    | TP-08-50(80)  | Manual  | 0.75      | 1.3          | 110,220,380 | 279                  | 95             | 135            | 368 | 90             | 225            | 16        |
|           | ATP-08-50(80) | Auto    | 0.75      | 1            | 110,220     | 279                  | 95             | 135            | 368 | 225            | 425            | 16.3      |
|           | GTP-08-50(80) | Auto    | 0.75      | 1            | 110,220     | 280                  | 95             | 135            | 369 | 187            | 84             |           |

Note: The standard cable length is 5 M, and available option in 10 and 15 M ones.



## SUN MINES ELECTRICS CO.,LTD

7F, No.153, Sec. 3, Beishen Rd, Shenkeng Dist, New Taipei City 22203, Taiwan  
 TEL : +886-2-2662-9292 FAX : +886-2-2662-7575  
 E-mail : info@sunmines.com.tw Website: www.blowtac.com.tw